

SAVD-R2E



Bays	Vertical beamwidth	Jumpers cable	Length	Power (KW)	Gain (dBi)	Input splitter
2	36°	½"	3m	2.7	8	7/16"
2	36°	½"	3m	5	8	1 5/8"
4	17°	½"	9m	10	11	1 5/8"
6	11°	½"	15m	12	13	1 5/8"
8	9°	½"	21m	16	14	3 1/8"
10	7°	½"	27m	20	15	3 1/8"

Technical Specification

Frequency 87.5 - 108MHz
Polarization Vertical
H Beamwidth 180°
V Beamwidth 80°
Gain 5.15 dBi
VSWR <1.3:1 Broadband
Impedance 50Ω
Power Handling 2KW to 5KW
Connectors DIN 7/16 or EIA flange 7/8"
Lightning Protection DC Grounded

Length 857mm.
Width 120mm.
Height 1734mm.
Weight 11Kg.
Mounting To suit pole 60mm Ø
Wind Load 25Kg @ 160Km/h.
Materials Fully stainless steel, silver plated brass, copper-beryllium an PTFE.

Features and specifications are subject to change without notice.

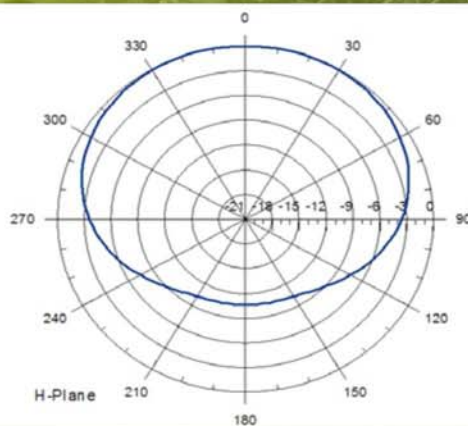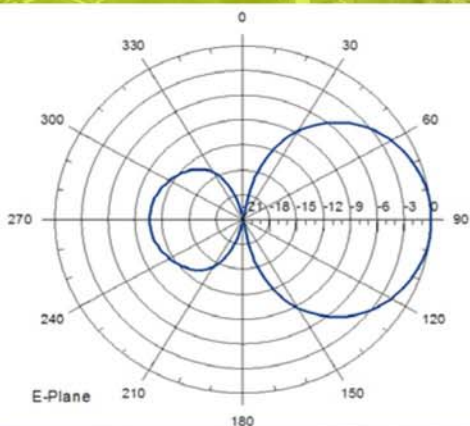

Seratel Technology

Calle Trópico, 6A • Bajo • Edificio Trópico
 28850 Torrejón de Ardoz • Madrid • España
 Tel. (34) 916 567 565 • Fax (34) 916 566 80
seratel@seratel.com • www.seratel.com